


## JUNIO 240 Ring-Joint Gasket, Type SRX

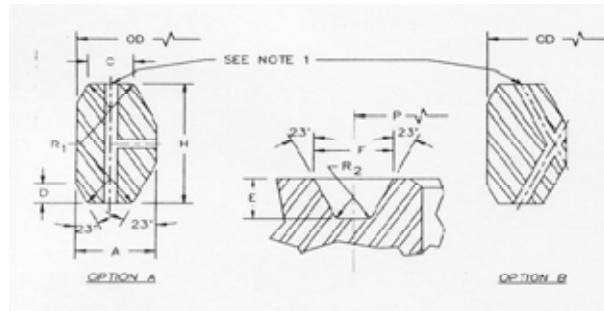

### API 17D Specification Type SRX Pressure Energised Ring Gaskets

Note 1: The two pressure passage holes illustrated in the SRX ring cross section prevent pressure lock when connections are made up underwater. Hole diameter shall be 0.06" (1.52mm). Two options are provided for drilling height of the pressure passage holes.

\*\* A plus tolerance of 0.008" (0.2mm) for width A and height H is permitted, provided the ring variation in width or height of any ring does not exceed 0.004in (0.1mm) throughout it's entire circumference.

Ring Number	Outside Diameter of Ring		Height of Ring		Width of Ring		Diameter of Flat		Width of Flat		Hole Size	
	OD		H		A		ODT		C		D	
	in	(mm)	In	(mm)	in	(mm)	In	(mm)	In	(mm)	In	(mm)
SRX-201	2.026	46.04	0.226	5.74	0.126	3.2	0.057	1.45	0.445	11.3	0.02*	0.50*
SRX-205	2.453	62.31	0.219	5.56	0.12	3.05	0.072#	1.83 #	0.437	11.1	0.02*	0.50*
SRX-210	3.844	97.63	0.375	9.53	0.213	5.41	0.125#	3.18 #	0.75	19.05	0.03*	0.80*
SRX-215	5.547	140.89	0.469	11.91	0.21	5.33	0.167#	4.24 #	1	25.4	0.06*	1.50*

# Tolerance on these dimensions is +0, -0.015" (+0, -0.4mm)

\* Tolerance on these dimensions is +0.02", -0 (+0.5mm, -0)

Tolerances: Inches (mm)

A* Width of ring.....	+0.008", - 0	(+ 0.2mm, - 0)
C Width of flat.....	+ 0.006", - 0	(+ 0.15mm, - 0)
D Height of Cham...	+ 0, - 0.03"	(+ 0, - 0.8mm)
H** Height of ring.....	+ 0.008", - 0	(+ 0.2mm, - 0)
OD Od of ring.....	+ 0.020", - 0	(+ 0.5mm, - 0)
R1 Radius in ring.....	+ 0.02", - 0.02"	(+/- 0.5mm)
23 Deg (angle).....	+ / - 1/2 Degree	

All data quoted are based on our extensive tests and years of experience, however, they can only serve as guide values. Failure to select proper sealing products could result in property damage and serious injury. Specifications are subject to change without notice.

[WWW.JUNIOSEAL.COM](http://WWW.JUNIOSEAL.COM)

Email Us Now: [junio@junioseal.com](mailto:junio@junioseal.com)